
isc Silicon PNP Power Transistor BD140

DESCRIPTION

- DC Current Gain-
  : h_{FE}= 63(Min)@ I_C= -0.15A
- Collector-Emitter Sustaining Voltage -
  : $V_{CEO(SUS)}$= -80V(Min)
- Complement to type BD139

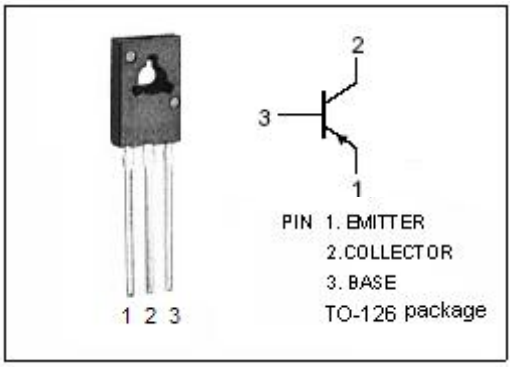


APPLICATIONS

- Designed for use as audio amplifiers and drivers utilizing complementary or quasi complementary circuits.

ABSOLUTE MAXIMUM RATINGS(T_a=25℃)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-100	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-1.5	A
I_B	Base Current-Continuous	-0.5	A
P_C	Collector Power Dissipation @ T_a=25℃	1.25	W
	Collector Power Dissipation @ T_C=25℃	12.5	
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature Range	-55~150	℃

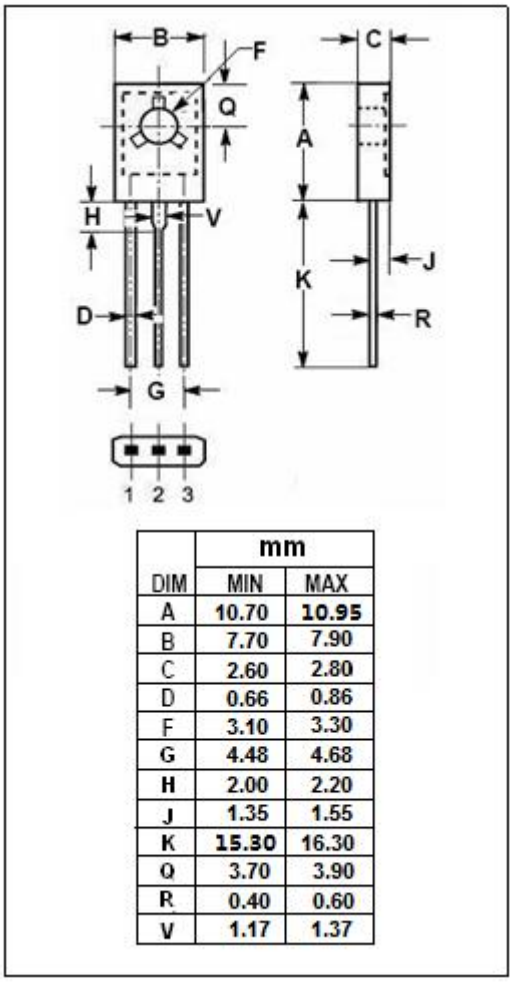

DIM	mm MIN	MAX
A	10.70	10.95
B	7.70	7.90
C	2.60	2.80
D	0.66	0.86
F	3.10	3.30
G	4.48	4.68
H	2.00	2.20
J	1.35	1.55
K	15.30	16.30
Q	3.70	3.90
R	0.40	0.60
V	1.17	1.37

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j\text{-}c}$	Thermal Resistance,Junction to Case	10	℃/W
$R_{th\ j\text{-}a}$	Thermal Resistance,Junction to Ambient	100	℃/W

Downloaded from Alldatasheet.com

isc Silicon PNP Power Transistor BD140

ELECTRICAL CHARACTERISTICS

T_C=25℃ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	I_C= -30mA ; I_B=0	-80			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	I_C= -0.5A; I_B= -50mA			-0.5	V
$V_{BE(on)}$	Base-Emitter On Voltage	I_C= -0.5A; V_{CE}= -2V			-1.0	V
I_{CBO}	Collector Cutoff Current	V_{CB}= -30V; I_E= 0 V_{CB}= -30V; I_E= 0,T_C=125℃			-0.1 -10	μA
I_{EBO}	Emitter Cutoff Current	V_{EB}= -5V; I_C=0			-0.1	μA
h_{FE-1}	DC Current Gain	I_C= -5mA ; V_{CE}= -2V	40			
h_{FE-2}	DC Current Gain	I_C= -0.5A ; V_{CE}= -2V	25			
h_{FE-3}	DC Current Gain	I_C= -0.15A ; V_{CE}= -2V	63		250	

Downloaded from Alldatasheet.com